

# iCelsius IP1 - Inspection Probe

Thermometer for iPad / iPhone / iPod touch



## Applications

### Food inspection

This inspection probe is built out of one piece of 316 stainless steel. Easy to clean and very durable, the 2" long tip is stepped down to 0.063" in diameter. Ideal for Harsh environment temperature measurement, frozen food inspection, point of use inspection and audits.

## Features

**Live display** - Shows you useful temperature data in one shot.

**Graphs** - Scroll and pan graphs over 1 year.

**Alarms** - Generate alarms when the temperature goes outside a configurable limit. On iPhone, call other phones when that happens.

**Data export** - Export by email, CSV or graph GIF

**Select units (°C and °F)** -

## Technical Specifications


### Hardware

Dimensions:	Handle: 76.2mm ø 14mm (3" ø 0.55") Tip base: 25mm ø 3.18mm (1" ø 0.125") Tip extremity: 20mm ø 1.6mm (0.8" ø 0.063") Cable: 30-150cm (12-60") retractable
Probe:	Stainless Steel (316), machined in one piece, polished
Weight	100g (3.5oz)
Power requirements	from iPhone / iPad / iPod
Measurement range	0° to +100° C (32° to 212° F)
Accuracy	Max ±0.7°C (±1.3°F) over whole range (see chart on next page)
Response time (to reach 90% of value)	Liquid: <2s Air (1m/s): <60s Air (still): <800s
Display resolution	0.01°C
Sampling frequency:	2Hz
Operating temperature:	0° to +100° C
Probe tip only:	(32° to 212° F)
Whole unit:	0° to +35° C (32° to 95° F)
Non operating temperature (whole unit):	-20° to 45° C (-4° to 113° F)
Relative humidity:	5% to 95% non condensing
Max operating altitude:	3000 m (10,000 feet)
Certifications:	CE, RoHS, MFi (Made for iPod)

### Software


Device support	iPhone 3G, 3GS, 4, 4S iPad, iPad 2 iPod touch 3 <sup>rd</sup> and 4 <sup>th</sup> generation
iOS Support	Requires iOS 4.2+
Installation, launch	Automatic installation when probe first inserted Automatic app launch when probe inserted afterwards
Units	Celsius or Fahrenheit
Data export	CSV: email, iTunes, export to Numbers, Dropbox GIF: email, Picture Library
Alarms	Thresholds for min/max limits Sound alarm, call another phone (iPhone only)
Data storage	Constrained by device memory using internal database
Graphs	Pan, zoom touch support Manual date setup
iCelsius API	We provide an API for selected developers willing to integrate our technology into their apps.

### Technical drawing

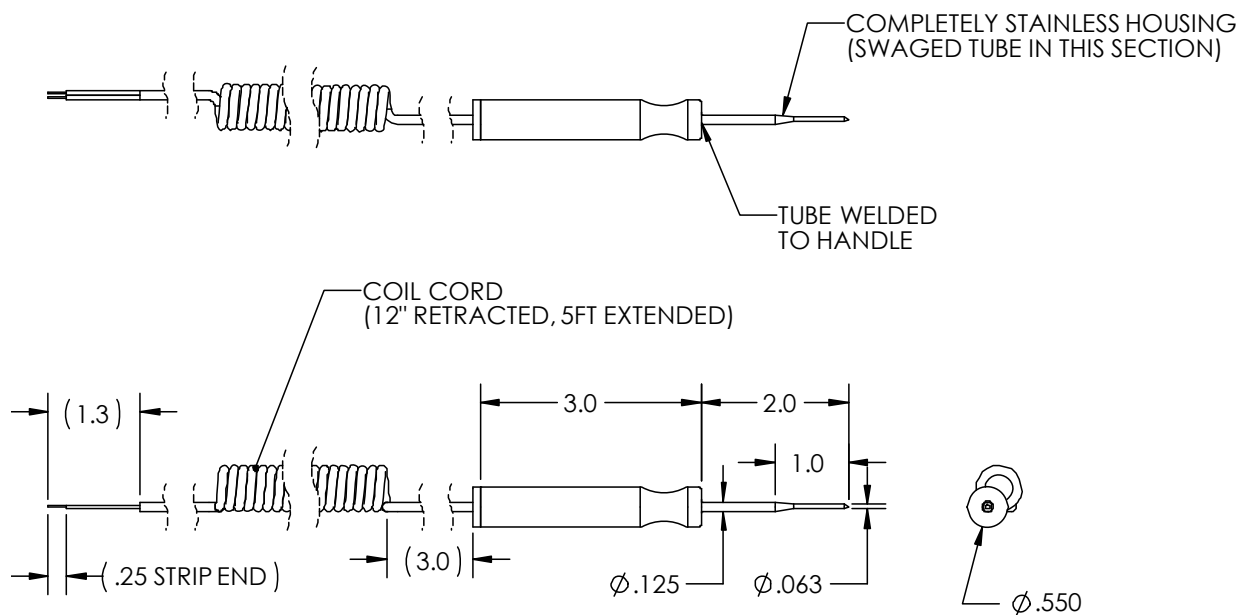

(dimensions in inches, connector not illustrated)

### Accuracy chart

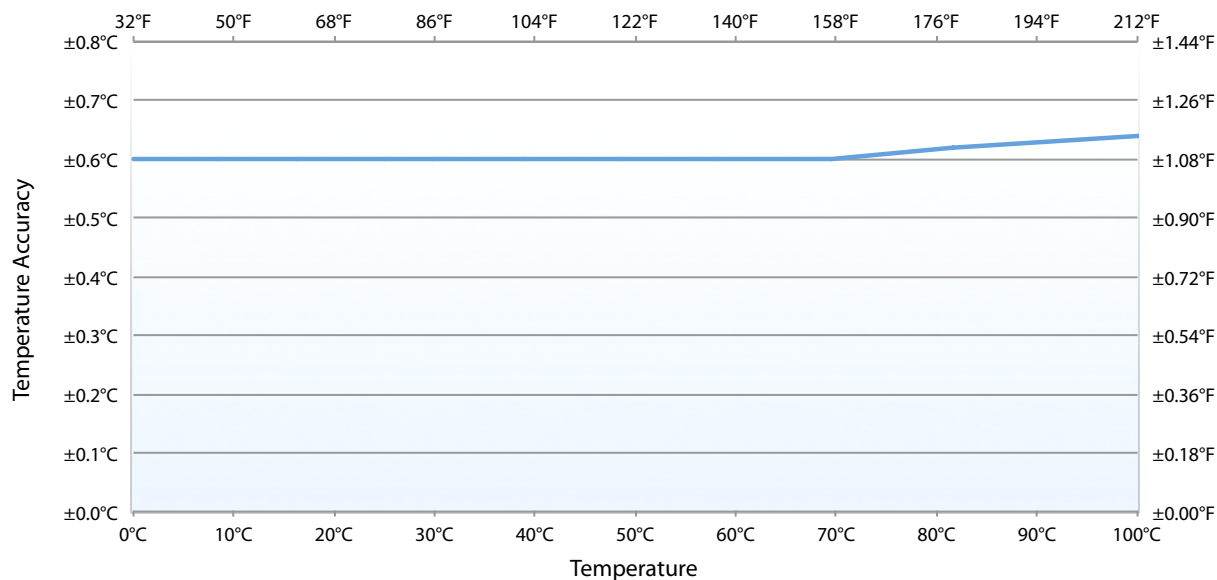

## More information

The iCelsius is a "Made for iPhone" certified device. The product passed validation tests from Apple Inc.

Find us on the Internet:



[www.icelsius.com](http://www.icelsius.com) *and* [www.aginova.com](http://www.aginova.com)



[www.icelsius.com/facebook](http://www.icelsius.com/facebook)



@icelsius

Contact us:

### **U.S. Office:**

Aginova Inc.  
2226 Central Ave., Suite One  
Middletown, OH 45044  
Phone: +1 513 727 1984  
Fax: +1 732 879 0248  
info (at) aginova.com

### **European Office:**

Aginova Sàrl  
PSE-D, EPFL  
CH-1015 Lausanne, Switzerland  
Phone: +41 21 693 8691  
Fax: +41 21 693 8692  
info-ch (at) aginova.com

Made for



iPod



iPhone



iPad